


YES - FHPL



Fire Hydrant Pressure Logger

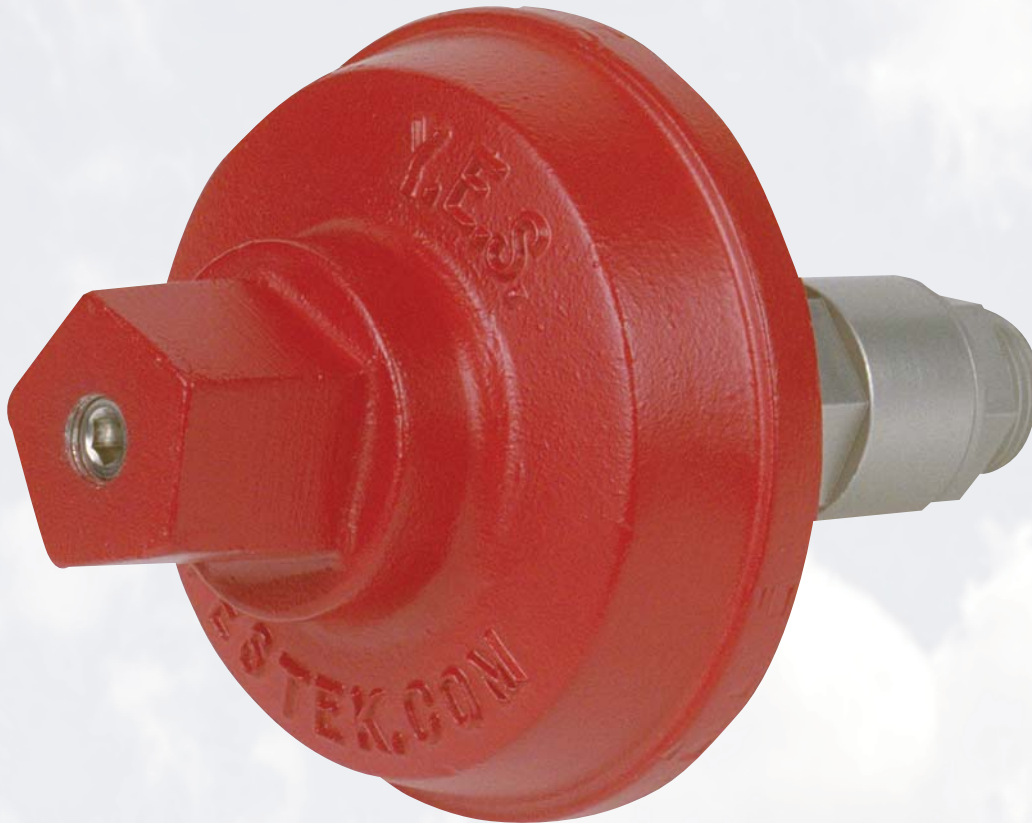

Fire hydrant pressure and temperature logger
Easily attached to most fire hydrants
Use of the hydrant is not impeded
ACR datalogger inside
TrendReader® Express software included



www.yestek.com

info@yestek.com

yes Environment Technologies

YES - FHPL



Fire Hydrant Pressure Logger

The YES-FHPL is a fire hydrant pressure and temperature logger which is easily attached to most fire hydrants. Installation is simple and the use of the hydrant is not impeded in any way. Easy to use TrendReader, Express software and PC interface cable is included with each instrument.

SPECIFICATIONS

Dimensions	4.5" diameter x 6.5" 115mm diameter x 165mm
Weight	1.9 pounds 875 grams
Material	Cast Aluminum cap Aluminum logger barrel
Power	Long life Lithium battery

PRESSURE SENSOR

Range 0 - 300 psig
Resolution 0.1 psi
Temperature compensated

TEMPERATURE SENSOR

Range - 40 to 85 deg C
- 40 to 185 deg F
Resolution 0.1 degree

EACH YES-FHPL COMES WITH

TrendReader, Express Software
PC Communication Cable
Pelican Carrying Case

DATALOGGER SPECIFICATIONS

ACR logger inside
16,000 data samples
12 bit resolution
3 year expected battery life
Sample interval - user adjustable
8 seconds to 34 minutes
Sampling methods
First in, first out or
Stop when full
Delayed start time

TRENDREADER EXPRESS SOFTWARE

Display data as graph or table
Simple download procedure
Windows based (Win 95 or higher)

THREE CONNECTION METHODS

Thread the 3.125" diameter cap directly to the hydrant or use an adapter
Connect a hose to the Hose Bib thread
Use the 1/4" NPT inlet

YES Environment Technologies Inc.
145 - 7391 Vantage Way
Delta, BC, Canada V4G 1M3
Toll free 877-940-7007
Ph 604-940-7007
Fax 604-940-7044



Authorized Dealer

Utility Service & Supply, Inc.
401 Lawton Ave.
Monroe, Ohio 45050
800-442-0091
UtilitySupplies.com

www.yestek.com